



Parallel : LK7 Series Setscrew Type

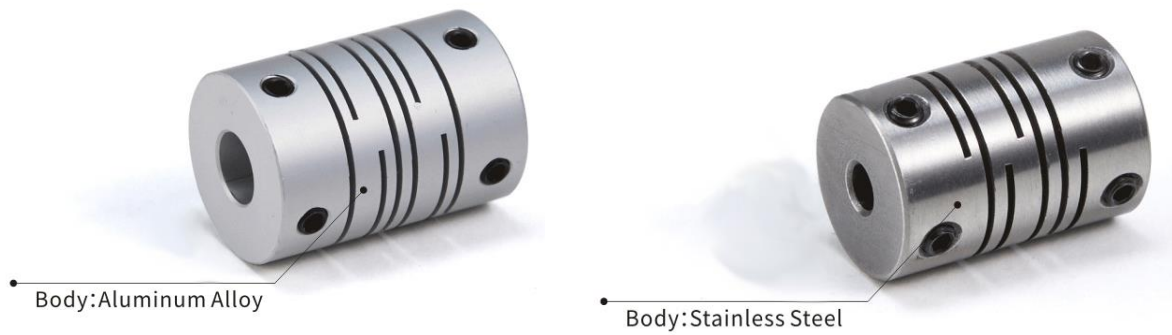

- One-piece metallic spring coupling
- Zero backlash
- Absorption of parallel, angular misalignment and shaft end-play by spring action
- Identical clockwise and anticlockwise rotational characteristics
- Material: Aluminium alloy and stainless steel

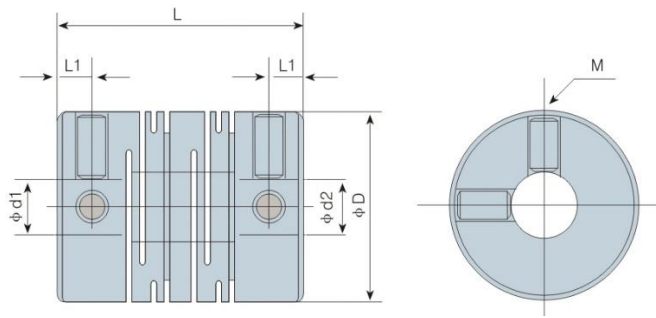

Dimensions (mm)

Part No.	d1-d2		ϕD	L	L1	M	Tightening Torque (N.m)
	Min Bore	Max Bore					
LK7-12	3	5	12	18.5	2.5	M2.5	0.5
SLK7-12	3	5	12	18.5	2.5	M2.5	0.5
LK7-16	4	6.35	16	23	3	M3	0.7
SLK7-16	4	6.35	16	23	3	M3	0.7
LK7-20	5	9.525	20	26	3	M4	1.9
SLK7-20	5	9.525	20	26	3	M4	1.9
LK7-25	5	12	25	31	4	M4	1.9
SLK7-25	5	12	25	31	4	M4	1.9
LK7-32	6	14	32	41	6	M5	3.7
SLK7-32	6	14	32	41	6	M5	3.7
LK7-40	8	18	40	56	8.5	M5	3.7
SLK7-40	8	18	40	56	8.5	M5	3.7
LK7-50	12	19	50	71	10.5	M6	6.3
SLK7-0	12	19	50	71	10.5	M6	6.3
LK7-63	12	24	63	90	13	M8	15
SLK7-63	12	24	63	90	13	M8	15

Note :

- 1.For other bore sizes which are not listed above, customized ones are available, please consult us.
- 2.Standard bore tolerance is for the shaft with tolerance h7 or h8, if other tolerance is required, please consult us.

Specifications

Part No.	Rated Torque (N.m)	Max. Rotational Frequency (rpm)	Moment of Inertia (Kg.m ²)	Static Torsional Stiffness (N.m/rad)	Errors of Eccentricity (mm)	Errors of Angularity (°)	Errors of Shaft End-play (°)	N.W. (g)
LK7-12	0.4	30000	9.0×10^{-8}	33	0.1	1.5	± 0.3	4
LK7-16	0.5	22000	3.3×10^{-7}	46	0.1	1.5	± 0.3	8
LK7-20	1	18000	9.5×10^{-7}	115	0.1	1.5	± 0.3	15
LK7-25	2	14000	2.8×10^{-6}	165	0.15	1.5	± 0.35	28
LK7-32	4	10000	9.8×10^{-6}	270	0.15	1.5	± 0.35	64
LK7-40	6.3	9400	3.2×10^{-5}	345	0.2	1.5	± 0.35	130
LK7-50	11	7600	1.0×10^{-4}	580	0.2	1.5	± 0.35	276
LK7-63	16	6000	3.3×10^{-4}	830	0.2	1.5	± 0.35	570
SLK7-12	0.5	30000	2.4×10^{-7}	60	0.1	1.5	± 0.3	11
SLK7-16	0.6	22000	9.4×10^{-7}	80	0.1	1.5	± 0.3	23
SLK7-20	1.2	18000	2.7×10^{-6}	235	0.1	1.5	± 0.3	42
SLK7-25	2.2	14000	7.9×10^{-6}	315	0.15	1.5	± 0.35	81
SLK7-32	4.4	10000	2.8×10^{-5}	837	0.15	1.5	± 0.35	184
SLK7-40	7.5	9400	9.3×10^{-5}	980	0.2	1.5	± 0.35	376
SLK7-50	7.5	7600	2.9×10^{-4}	1385	0.2	1.5	± 0.35	796
SLK7-63	19	6000	9.5×10^{-4}	1795	0.2	1.5	± 0.35	1656

Note:

1. Moment of inertia and weight are based on the maximum size bores.
2. Dynamic balance is not accounted for in calculating maximum speed.