


Parallel : LK2 Series Setscrew Type



- One-piece metallic spring coupling
- Zero backlash
- Absorption of parallel, angular misalignment and shaft end-play by spring action
- Identical clockwise and anticlockwise rotational characteristics
- Material: Aluminium alloy and stainless steel

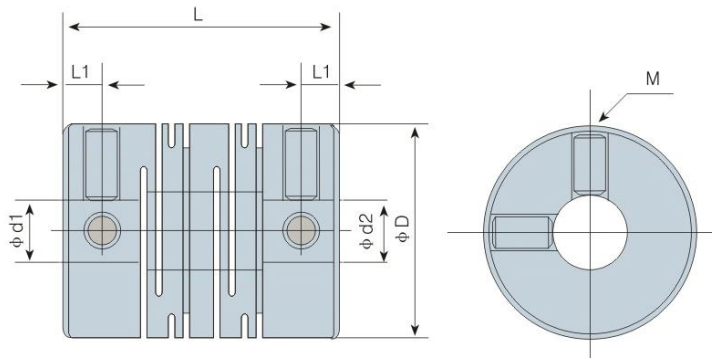

Dimensions (mm)

Part No.	d1-d2		ϕD	L	L1	M	Tightening Torque (N.m)
	Min Bore	Max Bore					
LK2-075	4	6.35	19.1	19.1	2.55	M3	0.7
SLK2-075	4	6.35	19.1	19.1	2.55	M3	0.7
LK2-100	5	10	25.4	25.4	3.55	M4	1.9
SLK2-100	5	10	25.4	25.4	3.55	M4	1.9
LK2-112	6	12.7	28.6	28.6	3.60	M5	3.7
SLK2-112	6	12.7	28.6	28.6	3.60	M5	3.7
LK2-150	8	15	38.1	38.1	4.15	M5	3.7
SLK2-150	8	15	38.1	38.1	4.15	M5	3.7
LK2-200	12	19	50.8	50.8	5.25	M6	6.3
SLK2-200	12	19	50.8	50.8	5.25	M6	6.3

Note :

- 1.For other bore sizes which are not listed above, customized ones are available, please consult us.
- 2.Standard bore tolerance is for the shaft with tolerance h7 or h8, if other tolerance is required, please consult us.

Specifications

Part No.	Rated Torque (N.m)	Max.Rotational Frequency (rpm)	Moment of Inertia (Kg.m ²)	Static Torsional Stiffness (N.m/rad)	Errors of Eccentricity (mm)	Errors of Angularity (°)	Errors of Anguarity (mm)	N.W. (g)
LK2-075	0.5	10000	6.0×10^{-7}	110	0.1	1.5	±0.15	12
SLK2-075	1.4	10000	2.47×10^{-6}	170	0.1	1.5	±0.15	33
LK2-100	1.6	8000	4.41×10^{-6}	260	0.1	1.5	±0.15	26
SLK2-100	4.2	8000	1.84×10^{-5}	330	0.15	1.5	±0.15	75
LK2-112	9.0	6000	7.92×10^{-5}	560	0.15	1.5	±0.15	36
SLK2-112	1.0	10000	1.71×10^{-6}	230	0.1	1.5	±0.15	102
LK2-150	2.2	10000	7.06×10^{-6}	320	0.1	1.5	±0.15	87
SLK2-150	3.1	8000	1.25×10^{-5}	790	0.1	1.5	±0.15	249
LK2-200	7.5	8000	5.31×10^{-5}	980	0.15	1.5	±0.15	215
SLK2-200	14.0	6000	2.29×10^{-4}	1450	0.15	1.5	±0.15	618

Note:

1. Moment of inertia and weight are based on the maximum size bores.
2. Dynamic balance is not accounted for in calculating maximum speed.