


## RSY Type

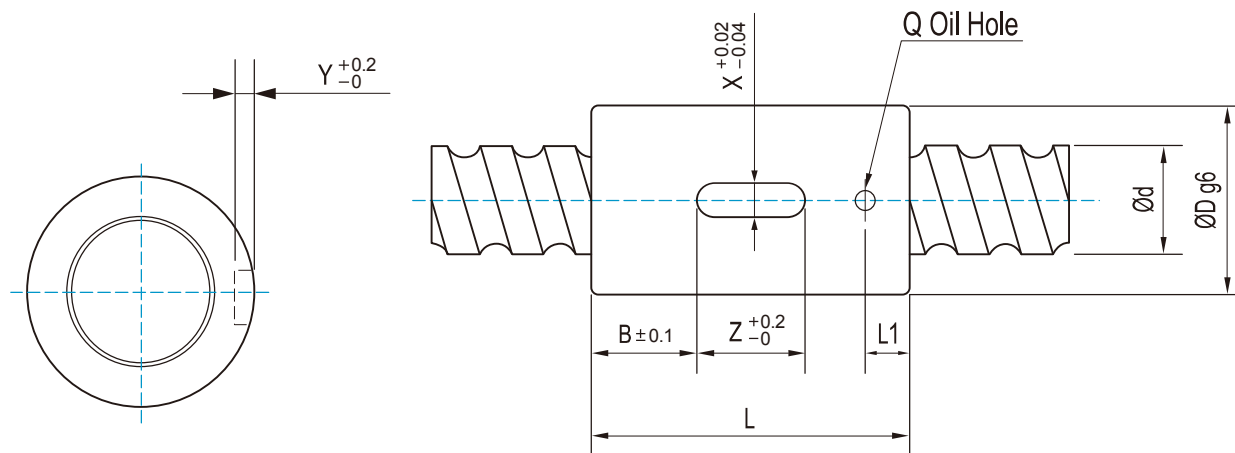

Unit : mm

| Model    | Dimensions |    |       |    |    |      |   |     |    |    |    |    |          |             |
|----------|------------|----|-------|----|----|------|---|-----|----|----|----|----|----------|-------------|
|          | d          | l  | Da    | D  | L  | B    | X | Y   | Z  | Q  | L1 | n  | (Ca Kgf) | (Coa (Kgf)) |
| 1202-3   | 12         | 2  | 1.2   | 24 | 30 | 9    | 3 | 1.5 | 12 | Ø3 | 4  | T3 | 265      | 377         |
| 1204-3   | 12         | 4  | 2.381 | 24 | 35 | 11.5 | 3 | 1.5 | 12 | Ø3 | 5  | T3 | 645      | 693         |
| 1205-3   | 12         | 5  | 2     | 24 | 40 | 14   | 3 | 1.5 | 12 | Ø3 | 5  | T3 | 514      | 594         |
| 1210-2   | 12         | 10 | 2     | 24 | 40 | 14   | 3 | 1.5 | 12 | Ø3 | 5  | T2 | 390      | 466         |
| 1602-3   | 16         | 2  | 1.2   | 28 | 40 | 10   | 5 | 2   | 20 | Ø3 | 5  | T3 | 300      | 503         |
| 1604-4   | 16         | 4  | 2.381 | 28 | 45 | 12.5 | 5 | 2   | 20 | Ø3 | 7  | T4 | 944      | 1254        |
| 1605-3   | 16         | 5  | 3.175 | 28 | 45 | 12.5 | 5 | 2   | 20 | Ø3 | 7  | T3 | 1049     | 1144        |
| ✓ 1605-4 | 16         | 5  | 3.175 | 28 | 50 | 15   | 5 | 2   | 20 | Ø3 | 7  | T4 | 1344     | 1525        |
| 1610-3   | 16         | 10 | 3.175 | 28 | 45 | 12.5 | 5 | 2   | 20 | Ø3 | 7  | T3 | 1181     | 1496        |
| 1616-2   | 16         | 16 | 3.175 | 28 | 45 | 12.5 | 5 | 2   | 20 | Ø3 | 7  | T2 | 833      | 997         |
| 2005-3   | 20         | 5  | 3.175 | 36 | 47 | 13.5 | 5 | 2   | 20 | Ø3 | 7  | T3 | 1181     | 1496        |
| ✓ 2005-4 | 20         | 5  | 3.175 | 36 | 53 | 16.5 | 5 | 2   | 20 | Ø3 | 7  | T4 | 1512     | 1995        |
| 2010-3   | 20         | 10 | 3.969 | 36 | 68 | 24   | 5 | 2   | 20 | Ø3 | 7  | T3 | 1621     | 1925        |
| 2020-4   | 20         | 20 | 3.175 | 36 | 55 | 17.5 | 5 | 2   | 20 | Ø3 | 7  | T4 | 1659     | 2464        |
| ✓ 2505-4 | 25         | 5  | 3.175 | 40 | 53 | 16.5 | 5 | 2   | 20 | Ø3 | 7  | T4 | 1704     | 2581        |
| ▲ 2510-3 | 25         | 10 | 3.5   | 40 | 54 | 17   | 5 | 2   | 20 | Ø3 | 7  | T3 | 1614     | 2460        |
| ✓ 3205-4 | 32         | 5  | 3.175 | 50 | 53 | 11.5 | 6 | 2.5 | 30 | Ø3 | 7  | T4 | 1924     | 3403        |
| 3210-3   | 32         | 10 | 6.35  | 50 | 70 | 20   | 6 | 2.5 | 30 | Ø3 | 7  | T3 | 3775     | 5877        |
| 3220-3   | 32         | 20 | 3.969 | 50 | 78 | 24   | 6 | 2.5 | 30 | Ø3 | 7  | T3 | 2141     | 3576        |
| ✓ 4005-4 | 40         | 5  | 3.175 | 63 | 56 | 13   | 6 | 2.5 | 30 | Ø3 | 7  | T4 | 2142     | 4342        |
| 4010-3   | 40         | 10 | 6.35  | 63 | 80 | 25   | 6 | 2.5 | 30 | Ø3 | 7  | T3 | 4216     | 7556        |
| 4020-3   | 40         | 20 | 5.556 | 63 | 83 | 26.5 | 6 | 2.5 | 30 | Ø3 | 7  | T3 | 3782     | 6468        |
| 5010-3   | 50         | 10 | 6.35  | 75 | 82 | 23   | 6 | 2.5 | 36 | Ø3 | 7  | T3 | 4633     | 9235        |
| 6310-4   | 63         | 10 | 6.35  | 85 | 90 | 29   | 6 | 3.5 | 32 | Ø5 | 14 | T4 | 6700     | 16230       |

Note : model with sign ✓ can be produced in left helix.

Note : ▲ The shaft thread is 3.5mm.